




**ARC-14S**

# **PORTABLE AIR CONDITIONER**

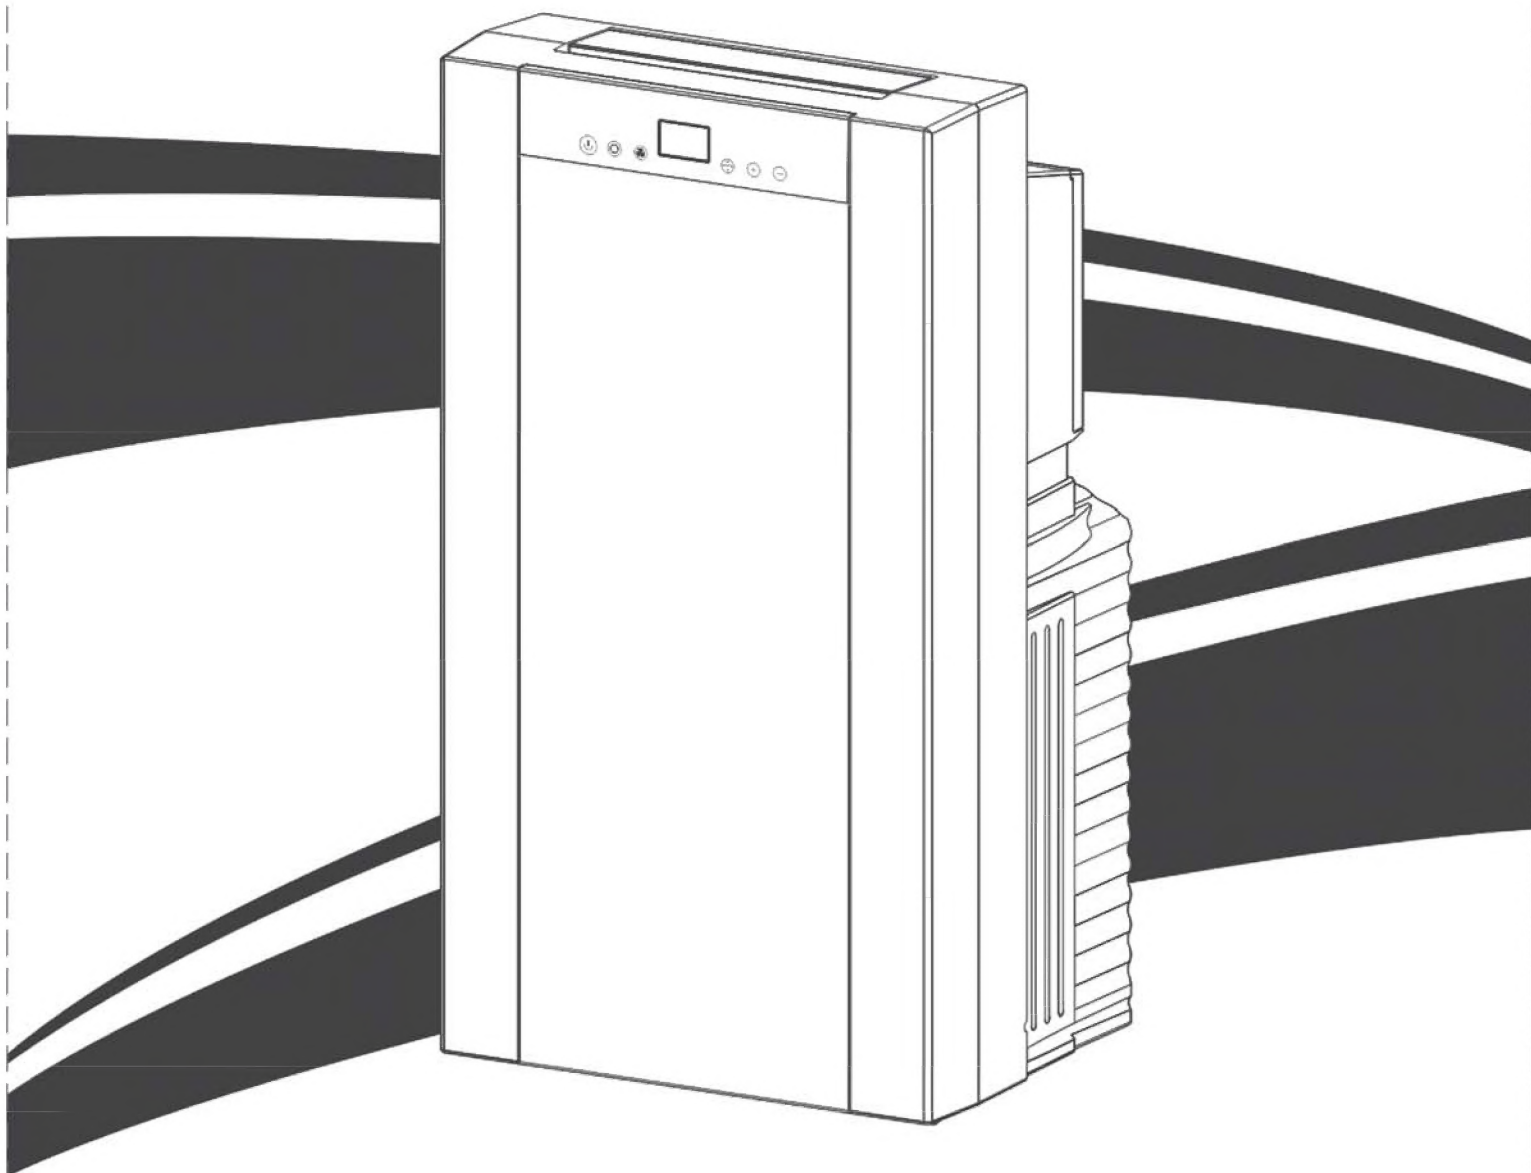

**Model No. ARC-14S**

**BTU: 14000**

## **User Manual**

# Introduction

---

Thank you for choosing the Whynter ARC-14S air conditioner for your home, apartment, or office. This appliance can be easily moved from room to room and set up in just minutes.

This is a multi-functional room air-exchanging, air-processing appliance, designed to provide the following functions: Air Conditioning, Dehumidifying, Heating (for heating mode only) and Independent Fan.

This manual will provide you with valuable information necessary for the proper care and maintenance of your new appliance. Please take a few moments and read the instructions thoroughly. If properly maintained, your appliance will maintain a high level of energy efficiency and give you many years of trouble free operation.

## Electrical Specifications

- 1.All electrical wiring at your location of use must comply with applicable electrical codes/ regulations and should have been installed by a qualified electrician. If you have any questions regarding the following instructions, contact a qualified electrician.
- 2.Check the available power supply and resolve any wiring problems before installation and operation of this unit.
- 3.For your safety and protection, this unit is grounded through the power cord plug when plugged into a matching wall outlet. If you are not sure whether the wall outlets in your home are properly grounded, please consult an electrician. DO NOT use plug adapters or extension cords with this unit.

## Warning

Improper handling can cause serious damage to the appliance.  
Read this manual carefully before operating the unit.

Do not expose the unit to liquids or excessive moisture.



Do not cover the air outlet while in use.



Keep children away from the unit and do not drop any objects into the air outlet.



Do not sit or place items on the unit.




Always turn the unit off and remove the power plug from the socket when cleaning.



Do not attempt to remove any part of the casing.



Remove the plug from the socket if the unit will be unused for an extended period.



Use only the correct power supply AC115V/60Hz



Do not operate the unit with a damaged plug or loose socket point.




Make sure that the back of the unit is at least 5 inches or more away from a wall.  
To ensure proper air intake, do not place the unit in front of curtains or drapes  
Route the power cord carefully to avoid a tripping hazard.

## WARNING


- If the power cord on this unit is damaged it must be replaced by the manufacturer its service agent or qualified persons in order to avoid a hazard.
- This appliance is not intended for use by children or other persons without assistance or supervision if their physical, sensory or mental capabilities prevent them from using it safely. Children should not be allowed to operate the unit unsupervised.
- This appliance is intended for domestic use only. Any other use may invalidate the warranty and might be dangerous.

## Identification of parts

### Identification of parts

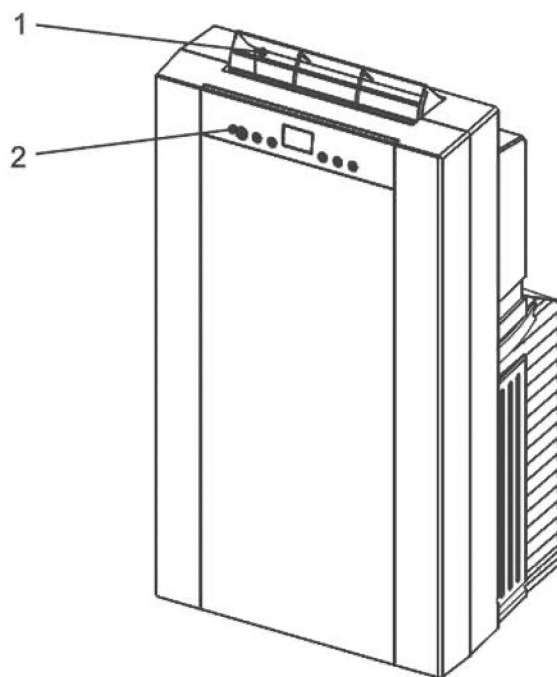


- 1. Air outlet
- 2. Control panel
- 3. Evaporator air intake
- 4. Air inlet hose
- 5. Air outlet hose
- 6. Casters
- 7. Drainage pipe
- 8. Power supply

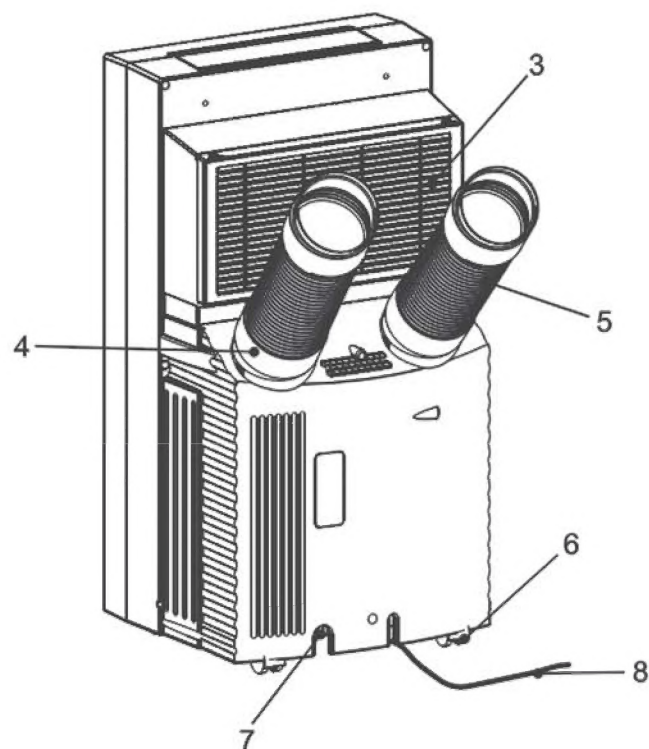



# Operation

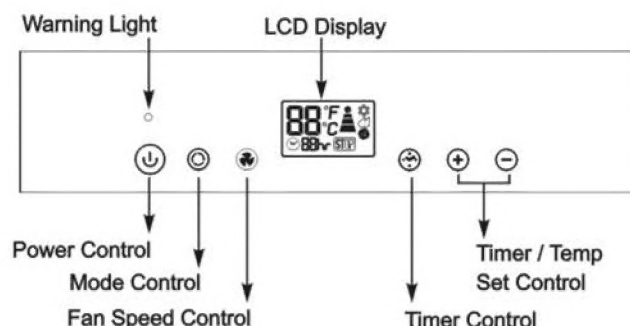

## Indication symbols on LCD :

- Cooling mode
- Dehumidify mode
- Fan only mode
- High fan speed
- Med fan speed
- Low fan speed
- 88°F 88°C Display set temperature
- STOP Warning light the machine will stop running
- 88hr Display timer setting of auto switch on/off

## Power Control

The power control turns the unit on and off.

## Warning Light

Condensed water may accumulate in the unit. If the internal tank becomes full, the Warning signal in the LCD Display will light up and the unit will not operate until the unit has been drained.

## Mode Control

The Mode Control has 3 settings:

### ● Cool ● Dehumidify ● Fan

The settings are adjusted with the Mode Control button. A light will indicate which setting is currently being used.

#### ● Cooling Mode

When cool mode is selected, "❄" will show on the LCD Display. Under the cooling mode, the air is cooled and hot air is exhausted to the outside through the exhaust tube. Adjust fan speed and air temperature to suit your desired comfort level.

**Note : the air exchange hoses must vent outside the room when using cool mode.**

#### ● Dehumidify Mode

When Dehumidify mode is selected, "☁" will show on the LCD Display. Air is dehumidified as it passes through the unit, without being in full cooling mode. If room temperature is higher than 77 degree Fahrenheit, the fan speed can be adjusted; otherwise the fan speed will remain on " Low ".

**Note : The warm air exchange hoses must vent inside the room when using Dehumidify Mode, not vented outside as with cooling mode. If the hoses are vented outside, some cooling may occur.**

## ● Fan Mode

When fan mode is selected, "🌀", "🌀" or "🌀" will be shown on the LCD Display. Under this mode, the unit will operate as a fan without the cooling function.

**Note : unit does not need to be vented in Fan mode**

## Fan Speed Control

The Fan Speed Control has 3 settings: High, Medium, and Low.

## Timer

### Auto turn off :

When the unit is in operation, press the timer button to set timer controls. Press "+" or "-" to select the number of hours you would like the unit to remain on before it automatically shuts off.

### Auto turn on :

When the unit is in operation, press the timer button to set timer controls. Press "+" or "-" to select the number of hours you would like the unit to automatically turn on.

**Note : The timer is adjustable between 1~24 hours.**

## Temperature controls

- Used for adjusting the thermostat.
  - The default display is set temperature.
  - In cooling mode, when "+" or "-" button is pressed, the set temperature is displayed and may be adjusted.
- Note : By pressing both "+" / "-" buttons at the same time for more than 3 seconds, the display will toggle between Celsius and Fahrenheit.**


**After switching the air conditioner off, you must wait 3 minutes before switching it back on again.**

# Operation


## Air Conditioner Remote Control

The functions work the same as your air conditioner's touch controls.  
All key function can be accessed from the remote control.

## CONTROL PANEL

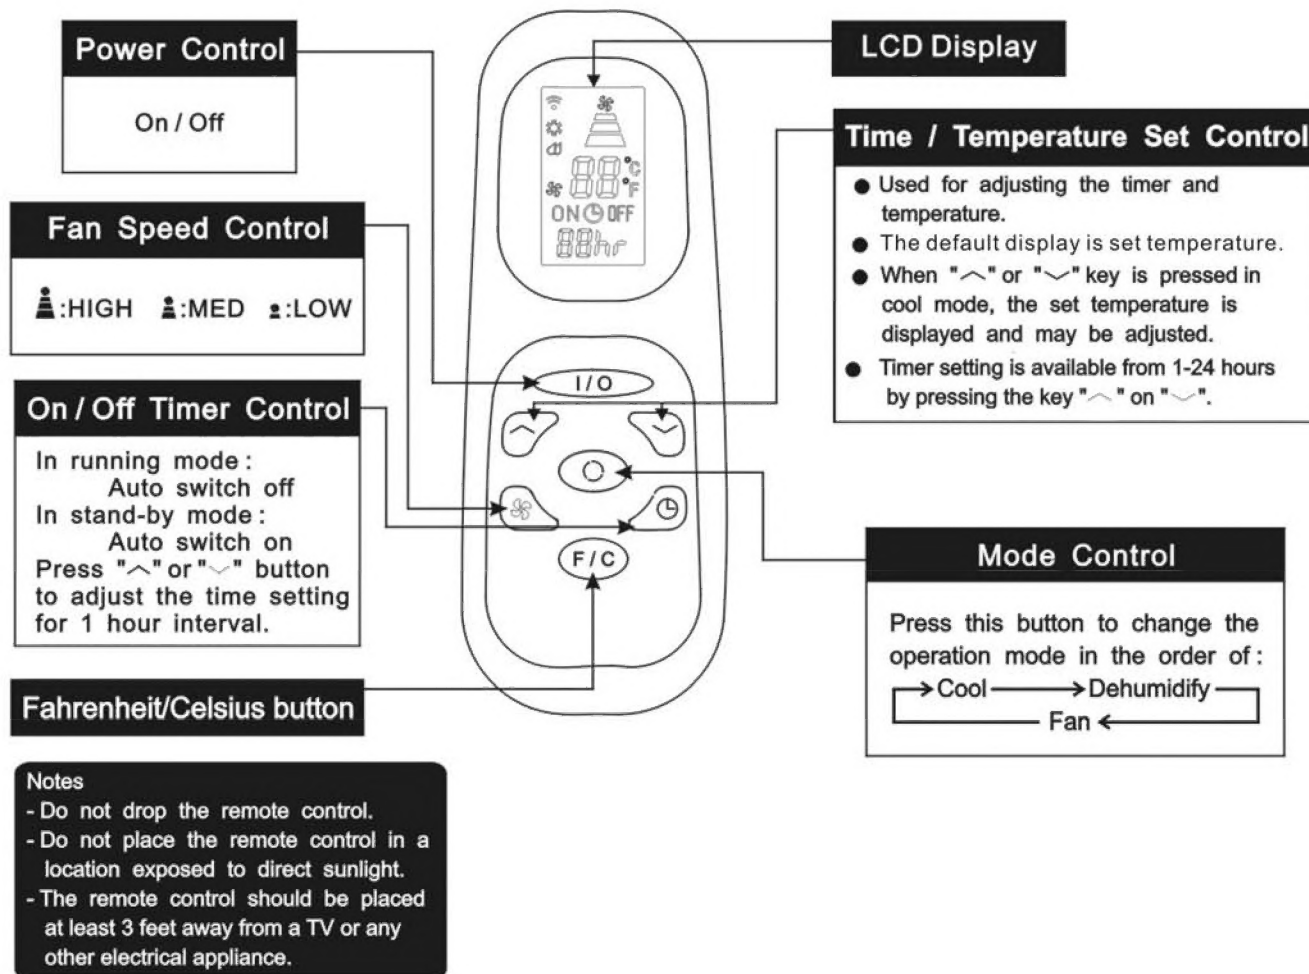

**Battery replacement :** Remove the cover on the back of the remote control and insert the batteries with the (+) and (-) poles pointing in the proper direction.

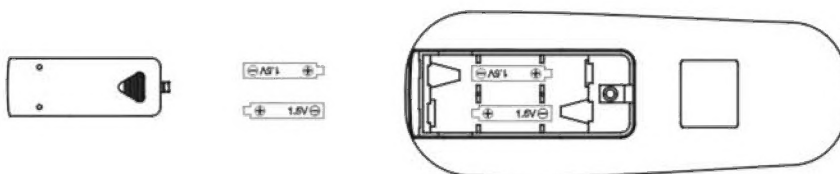

### CAUTION

Use only AAA or IEC R03 1.5V batteries.

Remove the batteries if the remote control is not used for a month or longer.

Do not attempt to recharge the supplied batteries included.


All batteries should be replaced at the same time, do not use new and old batteries together.

Do not dispose of the batteries in a fire as they may explode.






# Installation instructions

## Accessories Include

1. Window / Patio door slider kit.... 1 set
2. Fixture ..... 2 piece
3. Screws ..... 8 pieces
4. Heat exhaust hose connector ... 4 pieces
5. Heat exhaust hose ..... 2 piece
6. Cover ..... 2 piece

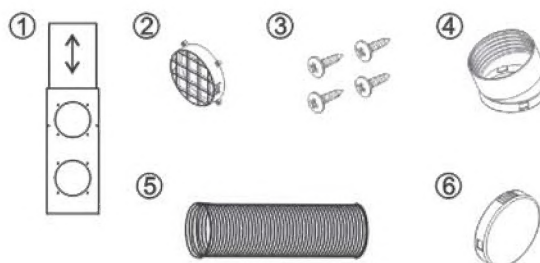

1. Adjust the plastic panel to the width or height of your window and tighten the 2 screws that are attached to the panel.
2. Push the round window panel adapter through the rear of the plastic panel. Line up the holes and tighten the adapter with 4 screws that are included in the kit. (Tighten screws from the front.)
3. Install the window plastic panel into the window. If necessary use duct tape to better secure the panel.
4. Connect the exhaust hose to the unit by inserting the hose connector, which is attached to the hose, into the exhaust hose.
5. Move the unit to the window, extend the hose and attach the other end of the hose to the window. Align the tabs on the hose and window panel adapters and fasten them together.

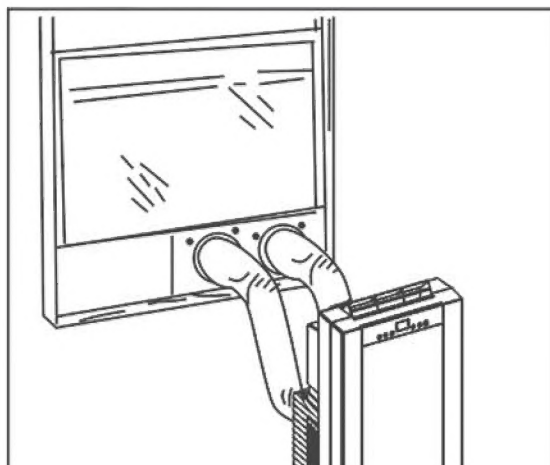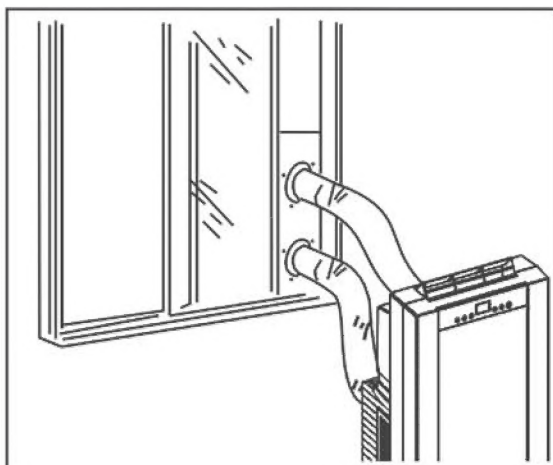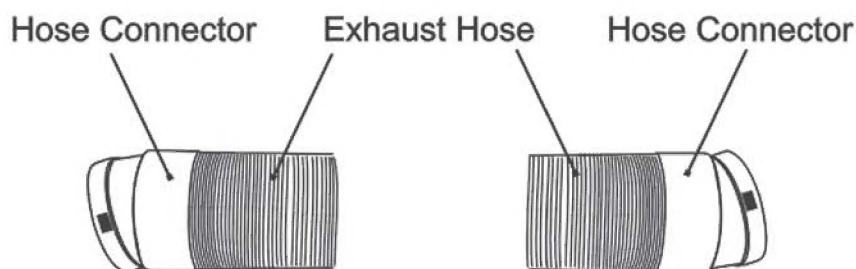

# Troubleshooting

Problem	Possible Causes	Solutions
The portable air conditioner does not turn on	There was a power failure	Restore the power supply
	The automatic switch, line fuse, or breaker has been tripped	Flip the switch / change the fuse / turn the breaker back on. Also note that you may have too many appliances drawing power on one circuit, so you may need to move the other appliances to another circuit
	The power supply voltage is too low	Move the unit onto another circuit with the correct voltage
	The power cord is damaged	Call for service. Only authorized personnel should replace damaged power cord or power plug
The unit turns on, but the compressor does not turn on (the fan runs but the unit is not cooling)	The LCDI plug for the unit is tripped	Press the Reset button on the LCDI plug
	The room temperature is outside of the operational tolerances of the unit	This unit is designed to work in ambient temperatures of 64°F to 95°F
	The Cooling mode is not on	Press the Mode Control button until the Cooling icon is selected
	The compressor has not turned on yet because of time delay	Give the compressor 3 minutes to turn on after the Cooling mode has been selected
	The set temperature is too high	Set the air conditioner to a lower temperature
The air coming out of the unit is not very cold, or the airflow volume is weak	The internal water reservoir is full	Either manually drain the water or allow the unit to exhaust the water itself. Then cooling will resume
	The filters are dirty or obstructed	Clean the filters
	The air intake is obstructed	Make sure there is at least 20" of clearance from the air intake and the length of the exhaust hose is as short as possible
	The exhaust is obstructed	Check for and remove any obstructions
The unit has worked for a long time, but the room is not cold enough	The unit is set to low fan speed	Set the unit to a higher fan speed
	Windows or doors are open	Close all windows and doors into the room when the unit is cooling
	There are too many people in the room	You may need additional cooling or another air conditioner
	There is direct sunshine into the room	Close curtains and blinds and try to minimize the amount of direct sunlight into the room
	The room is a kitchen, with many heat-producing appliances	You may need additional cooling or another air conditioner
	There is a server in the room	You may need additional cooling or another air conditioner
	The room is too large	You may need additional cooling or another air conditioner
The unit is very noisy	There are many electrical appliances in the room	You may need additional cooling or another air conditioner
	The unit is not level	Make sure the unit is level
The unit is leaking water onto the floor	The surface underneath the unit is uneven	Move the unit to a location with a level and hard floor
	The unit is tilted or is not level	Make use the unit is level
	The water tank is full	Drain water from the drain plug at the back of the air conditioner



# Troubleshooting

## Appliance maintenance

### 1 Cut off the power supply

Switch off the air conditioner and disconnect from the power outlet.



### 2 Cleaning the air conditioner

Use a soft damp cloth to wipe the body of the air conditioner.



### 3 Never use harsh chemicals, oil-based products or other cleaning solutions.



### 4 Do not spill water onto the air conditioner



Avoid risk of shock, never use the unit in wet areas.

## Air filter maintenance

To ensure the air intake is filtered properly, it is crucial to clean the air filter after about 100 hours of use.

### 1 Stop the appliance and remove the air filter.

Turn off the unit and remove the air filter from the unit



### 2 Clean and reinstall the air filter

Use a vacuum cleaner or tap lightly to remove loose dust. Then rinse thoroughly under warm running water. Dry thoroughly before re-inserting the filter.



### 3 **WARNING!**

**Never operate the air conditioner without the filter in place.**

## END OF SEASON STORAGE

- Switch off the air conditioner and disconnect the plug from the power supply outlet before cleaning the air conditioner.
- Clean the air filter.
- Drain the condensed water COMPLETELY
- On a warm day, turn on the Fan only mode for a couple of hours so that the inside can dry out completely.
- It is recommended that the air conditioner be put back into its original carton for storage.
- Do not stack heavy objects on top of the air conditioner.
- Make sure to store the remote control with the air conditioner.

# Specifications

- Figures noted in the contents are for reference only; variation may result due to application in different countries or regions, and shall be based on practical operation.

Description of product	Air Conditioner
Model	ARC-14S
Voltage/Frequency	AC 115V ~ 60Hz
Input power (Cooling)	1250W
Current (Cooling)	10.5A
Cooling capacity	14000 BTU/hr
Heating capacity	N/A
Dehumidifying capacity	4.0 pint /hour
Coolant	R-410A
Timer	24 hour
Dimensions (W) X(H)X (D)	18 7/8" X 15 23/32" X 35 7/16"
Weight	79 LBs

"Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice."



## **ONE YEAR LIMITED WARRANTY & THREE YEAR WARRANTY ON COMPRESSOR**

This WHYNTER portable air conditioner is warranted, to the original owner within the 48 continental states, for one year from the date of purchase against defects in material and workmanship under normal use and service. Should your Whynter portable air conditioner prove defective within one year from the date of purchase, return the defective part or the unit, freight prepaid (within two months of purchase; after two months to one year, customer will be responsible for freight cost to Whynter's service department), along with an explanation to Whynter's service department. Please ship the Whynter portable air conditioner in its original packaging material to avoid damage in transit. Please retain original box and packaging material. Under this warranty, Whynter will repair or replace any parts found defective. This warranty is not transferable. After the expiration of the warranty, the cost of labor and parts will be the responsibility of the original owner of the unit.

### **THIS WARRANTY DOES NOT COVER:**

- Acts of God, such as fire, flood, hurricanes, earthquakes and tornadoes.
- Damage, accidental or other wise, to the portable air conditioner while in the possession of a consumer not caused by a defect in material or workmanship.
- Damage caused by consumer misuse, tampering, or failure to follow the care and special handling provisions in the instructions.
- Damage to the finish of the housing, case, or other appearance parts caused by wear.
  - 1) Filter.
  - 2) Damage caused by repairs or alterations of the unit by anyone other than authorized by the manufacturer.
  - 3) Freight and Insurance cost for the warranty service.

To obtain service or information, contact

Whynter Innovations Group via Email at [service@whynter.com](mailto:service@whynter.com) or call 866-WHYNTER.

